


## Proline - Elastic 2M + IM fixed line - 2 hooks - Overload indicator

Part #7034

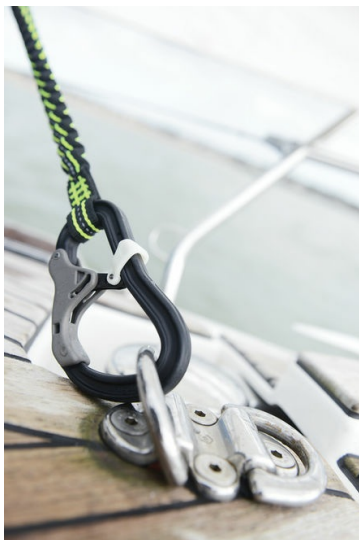

### Description

Tether with 3 double action safety hooks - Elastic + flat webbings - 2m + 1 m  
Maximum safety  
ErgoLockSystem (patented): automatically closes and locks the snap hook  
hook  
Locking indicator  
Retro-reflective webbing, visible at night  
Overload indicator (as per ISAF offshore special regulations)

Uniquely easy to use  
Easy opening snap hook  
V-Nose (patented): special tip makes hooking and unhooking easy with one hand  
Wide opening snap hook (26 mm)  
Compact light tether

Exclusive feature: SmartLoop  
Product can adapt to suit all needs and users.  
SmartLoop lets you:  
turn a single webbing tether into a double webbing tether  
turn a double webbing tether into two single webbing tethers

Exclusive feature: EcoLogic  
Removable snap hook lets you increase the lifespan of the product by replacing the webbing only. Our exclusive EcoLogic feature makes ProLine a budget-friendly range!

Regulations  
Compliance with ISO 12401:2009 and WORL SALING regulations  
Overload indicator on all models

Special materials for less weight and greater performance  
Wichard carefully selects materials (aluminium, carbon fibre, etc.)  
ProSnap snap hooks are forged in special aluminium to ensure excellent rustproof qualities and minimum weight.

ProLine webbings are designed with materials that absorb very little water and dry quickly.

### Applications

Safety on board

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department with the following conditions.

### Technical information

Non-contractual pictures



Working Load Limit (WLL): for industrial applications only.  
The safety factor is 5 times the breaking load.  
 $WLL = \text{Breaking load} / 5$